


FLEXIBILITY FOR YOUR COMFORT

Enjoy efficient whole-house comfort with highly versatile multi-zone systems that can meet the comfort needs of everyone and every room in your home. The **FREE MATCH M R32** series provides both cooling and heating in no fewer than five separate zones independently.

- G20 Inverter Technology
- Can Power Up To 5 Indoor Units
- Multipoint Diagnostics
- Automatic Restart in the Event of a Power Failure
- Compact and Silent Design
- Coil (Outdoor): Copper Tube and Aluminum Fins with Anti-corrosion Coating (Gold Fins / 1500-hour Salt-water Spray)
- Coil (Indoor): Copper Tube and Aluminum Fins with Anti-corrosion Coating (Blue Fins / 500-hour Salt-water Spray)
- Environmentally-friendly R32 Refrigerant

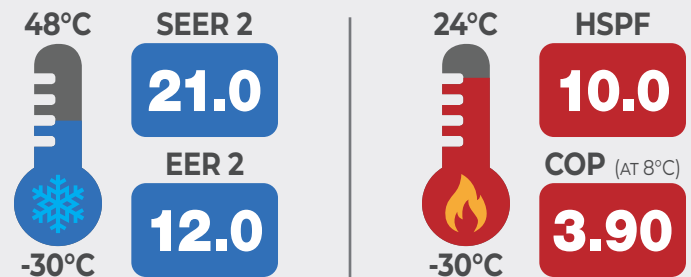

DURABLE, ROBUST CONSTRUCTION

All **FREE MATCH M R32** units are manufactured from heavy-gauge laminated steel and finished with a highly resistant powder coating. The anti-corrosion acrylic resin coating on the coils offers enhanced protection in corrosive environments, while improving hydrophilic properties and efficiency.



GREE HEAT PUMPS...
TOWARDS ZERO EMISSIONS!





Condensing Unit
18,000 BTU/h



Condensing Unit
24,000 BTU/h



Condensing Unit 30,000, 36,000,
42,000 & 48,000 BTU/h

FREE MATCH M R32			18000	24000	30000	36000	42000	48000
Outdoor Unit:			GWHD(18)ND6MO	GWHD(24)ND6MO	GWHD(30)ND6MO	GWHD(36)ND6MO	GWHD(42)ND6MO	GWHD(48)ND6MO
AHRI Reference Code:	• w/ duct:		214931586	214931587	214931588	214931589	214931590	216573051
	• w/o duct:		214931591	214931593	214931594	214931595	214931596	216573052
	• mixed:		214931592	214931597	214931598	214931599	214931600	216573053
Connectable Indoor Units		/	2	2 à 3	2 à 4	2 à 4	2 à 5	2 à 5
Power Supply		V/Hz/Ph	208-230 / 60 / 1					
SYSTEM PERFORMANCES (W/O DUCT)								
Rated Capacity	Cooling	BTU/h	18,000	24,000	28,400	36,000	42,000	48,000
	Heating	BTU/h	18,000	24,000	30,000	36,000	42,000	48,000
SEER 2		BTU/W*h	21.0	21.0	21.0	21.0	21.0	21.0
EER 2		BTU/W*h	12.0	13.3	13.6	12.0	13.0	12.0
HSPF 2		BTU/W*h	10.0	10.0	10.0	10.0	10.0	10.0
COP at 8 °C (47 °F)		/	3.90	3.90	4.19	3.56	3.90	3.60
SYSTEM PERFORMANCES (W/ DUCT)								
Rated Capacity	Cooling	BTU/h	18,000	24,000	28,400	36,000	42,000	48,000
	Heating	BTU/h	18,000	24,000	30,000	36,000	42,000	48,000
SEER 2		BTU/W*h	18.0	18.0	18.0	18.0	18.0	18.0
EER 2		BTU/W*h	11.7	12.0	12.0	11.7	12.0	11.7
HSPF 2		BTU/W*h	8.5	8.5	8.7	8.5	8.5	8.5
COP at 8 °C (47 °F)		/	3.60	3.60	3.80	3.40	3.70	3.40
SYSTEM PERFORMANCES (MIXED)								
Rated Capacity	Cooling	BTU/h	18,000	24,000	28,400	36,000	42,000	48,000
	Heating	BTU/h	18,000	24,000	30,000	36,000	42,000	48,000
SEER 2		BTU/W*h	19.0	19.0	19.0	19.0	19.0	19.0
EER 2		BTU/W*h	11.8	12.2	12.2	11.8	12.2	11.7
HSPF 2		BTU/W*h	9.3	9.3	9.5	9.2	9.2	9.2
COP at 8 °C (47 °F)		/	3.60	3.60	3.80	3.40	3.70	3.40
OUTDOOR UNIT SPECIFICATIONS								
Ambient Temperature	Cooling	C° (F°)	-30 to 48 (-22 to 118)					
	Heating	C° (F°)	-30 to 24 (-22 to 75)					
Sound Pressure Level		dB(A)	54	58	62	63	63	63
Minimum Circuit Ampacity (MCA)		A	18.5	19.5	23	29	30	35
Maximum Overcurrent Protection (MOP)		A	20	25	35	35	45	45
Dimensions	Length	mm (in)	822 (32-23/64)	964 (37-61/64)	1020 (40-5/32)	1020 (40-5/32)	1020 (40-5/32)	1020 (40-5/32)
	Height	mm (in)	550 (21-21/32)	660 (25-63/64)	826 (32-33/64)	826 (32-33/64)	826 (32-33/64)	826 (32-33/64)
	Depth	mm (in)	352 (13-55/64)	406 (15-53/64)	427 (16-13/16)	427 (16-13/16)	427 (16-13/16)	427 (16-13/16)
Weight	Net	kg (lb)	34.0 (75.0)	51.0 (112.5)	66.0 (145.5)	80.0 (176.4)	80.0 (176.4)	81.0 (178.6)
	Gross	kg (lb)	37.0 (81.6)	55.5 (122.4)	73.0 (161.0)	86.0 (189.6)	86.0 (189.6)	87.0 (191.8)
REFRIGERATION SYSTEM								
Suction Line Size		mm (in)	ø 9.52 (3/8)	ø 9.52 (3/8)	ø 9.52 (3/8)	ø 9.52 (3/8)	ø 9.52 (3/8)	ø 9.52 (3/8)
Liquid Line Size		mm (in)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)
Maximum Pipe Length		m (ft)	40 (131.2)	60 (196.9)	80 (262.5)	80 (262.5)	100 (328.1)	100 (328.1)
Pipe Length to Farthest Indoor Unit		m (ft)	20 (65.6)	20 (65.6)	25 (82.0)	25 (82.0)	25 (82.0)	25 (82.0)
Maximum Pipe Elevation		m (ft)	15 (49.2)	15 (49.2)	25 (82.0)	25 (82.0)	25 (82.0)	25 (82.0)
Refrigerant Type / Charge		kg (oz)	R32 / 0.9 (31.8)	R32 / 1.7 (59.98)	R32 / 2.2 (77.62)	R32 / 2.7 (95.24)	R32 / 2.7 (95.24)	R32 / 2.7 (95.24)

Affordable comfort you can trust from the world's
largest manufacturer of air conditioners.



GREE Canada products are subject to continuous improvements. GREE Canada reserves the right to modify product design, specifications and information without notice and without incurring obligations.

COPYRIGHT © GREE CANADA, 2025. ALL RIGHTS RESERVED. DOCUMENT NO. : 062025

Authorized Dealer